


TOP VIEW OF SLAB

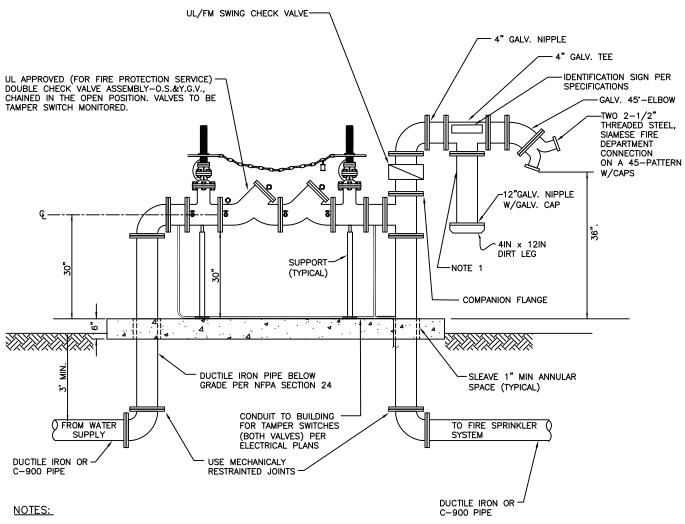

- 1. SIGNAGE PER CAMPUS STANDARD IDENTIFY BUILDING BY NAME OR PICTOGRAM AS REQUIRED BY FIRE DEPARTMENT.
- 2. ALL STEEL PIPE SHALL BE AS PER AWWA C-200 WITH $\frac{1}{4}$ " WALL AND COATED AND LINED BY FUSION BONDED EPOXY AS PER AWWA C-213, 20 MILS MIN.
- 3. ALL STEEL FLANGES SHALL BE CLASS D AS PER AWWA C-207.
- 4. ALL DUCTILE IRON FITTINGS SHALL MEET AWWA C-110 & C-153, CLASS 150. THE INTERIOR SHALL BE MORTAR LINED AS PER AWWA C-104 AND BELOW GROUND EXTERIOR SHALL HAVE A COAL TAR COATING AS PER AWWA C-203.
- 5. ALL NUTS AND BOLTS BELOW GROUND SHALL BE POLYETHYLENE ENCASED AS PER AWWA C-105 OR TAPE WRAPPED AS PER AWWA C-209, 20 MILS MIN. IN BOTH CASES.
- 6. BOTH GATE VALVES SHALL BE SUPERVISED BY THE FIRE ALARM SYSTEM.
- 7. CONTRACTOR SHALL PROVIDE CHAIN FOR LOCKING WHEELS TOGETHER (UNIVERSITY TO PROVIDE LOCK).
- 8. CONTRACTOR SHALL PROVIDE REMOVABLE INSULATION BLANKET.

DOUBLE CHECK VALVE ASSEMBLY - FW SERVICE

NTS